EasyBead®

NO MESS SEALANT APPLICATOR

Sealant Applicator User Guide

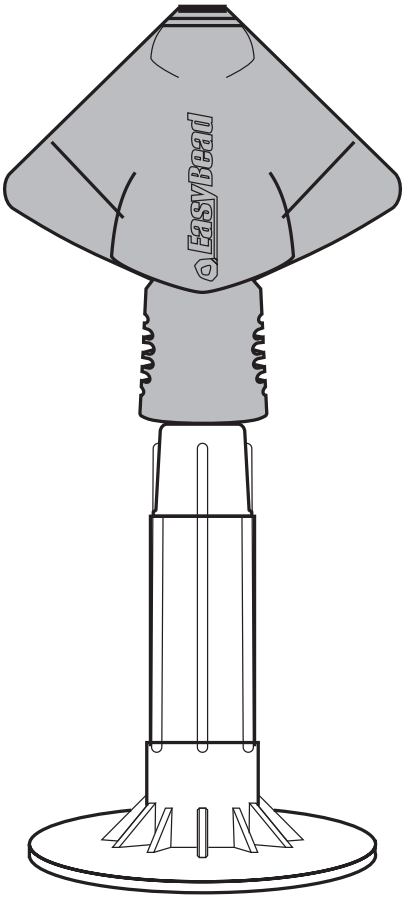

PLEASE READ INSTRUCTIONS CAREFULLY BEFORE USE!

GETTING TO KNOW EASYBEAD®

Please note, mastic gun and craft knife are not included.

A mastic gun is required to perform the actions listed in this guide.

Parts not shown to scale.

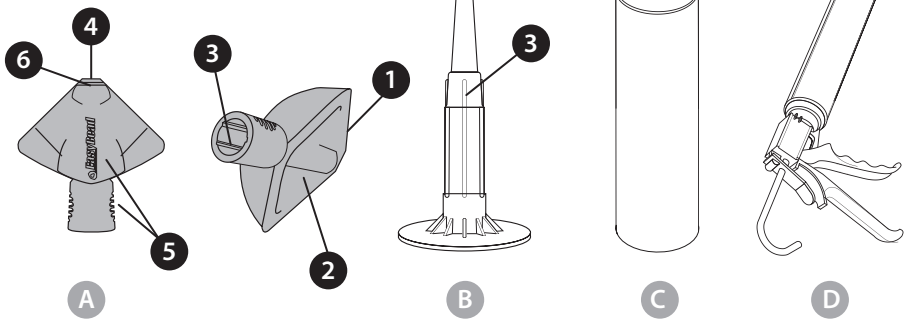

LIST OF ITEMS:

A. Easybead® Applicator

B. Easybead® Nozzle

C. Sealant Cartridge

D. Mastic Gun

PRODUCT FEATURES:

1. Applicator wipers
2. Applicator scoop recess
3. Aligning grooves
4. Smoothing tip
5. Grip points
6. Bead guides

IMPORTANT NOTES

For best results and good sealant adhesion, clean and dry surfaces before applying sealant. (For baths: fill bath fully with water to ensure optimum position to allow for potential joint movement). Sealant cures more quickly in a warm room temperature. Any delay in smoothing the bead may result in an uneven finish.

The Easybead® Applicator is recommended for use on clean, flat, and smooth surfaces. Suitable for application on joints 1-10mm width. Not suitable for abrasive surfaces such as brickwork or concrete. Easybead® Applicator is not recommended for use with any Nozzle other than an Easybead® Nozzle.

CLEANING EASYBEAD®

Remove fresh sealant using paper towel, cloth towel and multi-purpose wet-wipes. Do not use abrasive or aggressive chemical products for cleaning, as it may affect the product finish and performance. To re-use the Easybead® Applicator and Nozzle, clean immediately after use to prevent dried sealant causing a blockage.

Keep all items out of reach of children. Use gloves. Take extra care when using a knife.

QUICK GUIDE TO USING EASYBEAD®

Follow these simple steps to get a professional bead!

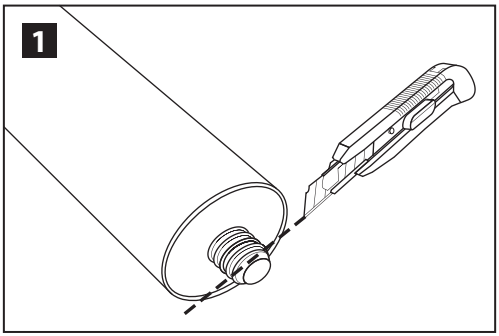

Open or cut off the cartridge tip **ABOVE** the screw thread.

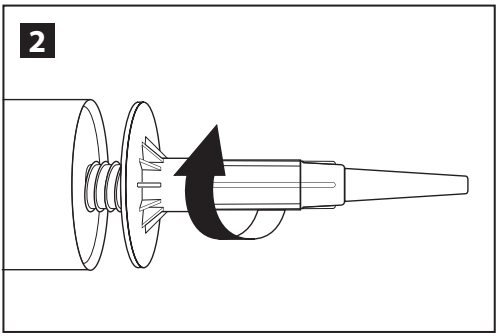

Screw the Nozzle onto the cartridge. Insert into mastic gun.

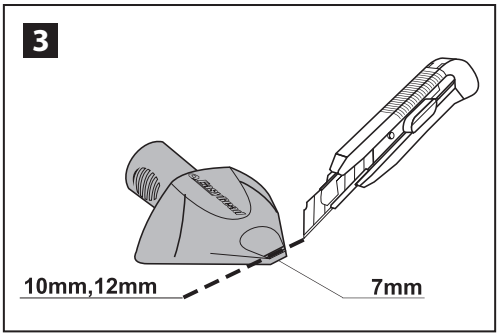

The Applicator is pre-set to produce a 7mm bead. This can be increased to suit the joint by trimming the tip as shown. Carefully check the size of bead you require before trimming the Applicator. It is **IMPORTANT** that you use a sharp knife to trim the Applicator to avoid leaving any rough edges as this will affect the bead finish.

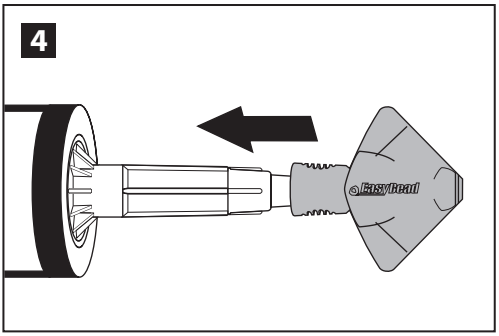

Push the Applicator securely onto the Nozzle using aligning grooves **(3).**

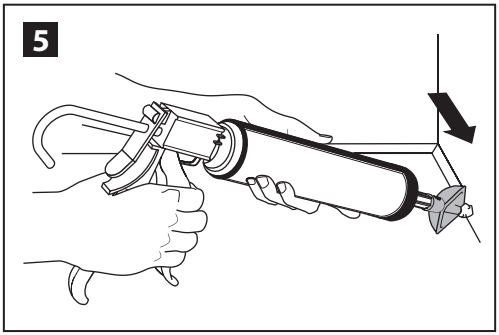

Squeeze the gun trigger to produce a steady flow of sealant, then draw the Applicator gently along the joint. Apply light pressure to ensure that the flexible wiping Applicator edges **(1)** fit tightly against the surface to prevent sealant from escaping.

Any imperfections are easily rectified by re-drawing the Applicator over the same area.

USING EASYBEAD® AS A HAND-HELD TOOL

The following instructions only apply when using Easybead® as a hand-held finishing tool.

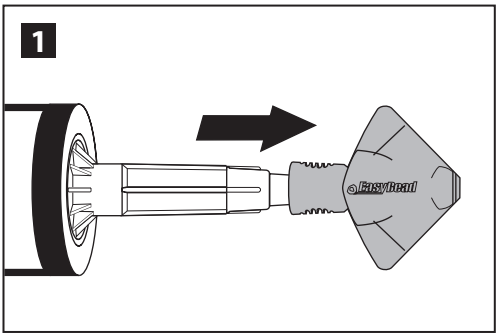

Detach the Applicator from the Nozzle.

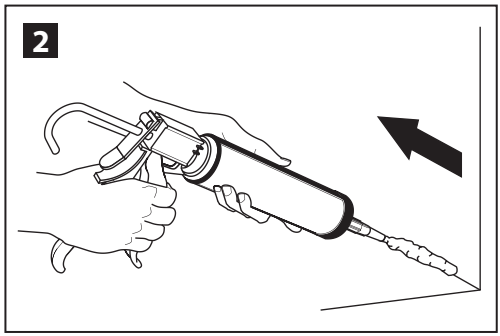

Apply sealant to the joint.

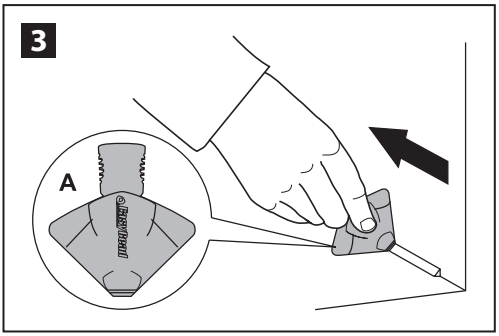

Draw the Applicator over the fresh sealant bead as shown. As the bead is being formed, any access sealant is scooped into the Applicator recess area.

Any imperfections are easily rectified by re-drawing the Applicator over the same area.

PRODUCT GUARANTEE

This product has been manufactured to meet high operational demands. For guarantee and general customer service information, please contact your local retailer. Guarantee is limited to replacement of the product only.

DISCLAIMER

This product should be used in accordance with manufacturer's instructions. Easybead® Applicator and Easybead® Nozzle may not be suitable for use with materials other than those recommended by the manufacturer.

CONTACT INFORMATION

For technical support and advice on how to use any of our products please email our Technical Department at **support@easybead.co.uk** . For more information please visit: **www.easybead.co.uk**

27 Old Gloucester Street, London, England, WC1N 3AX
Discover more at **www.easybead.co.uk**

Easybead® is a registered trade mark of **Duckbill Products Limited.**

5 060318 790210